

To be published in Optics Letters:

Title: High-power 200-fs Kerr-lens mode-locked Yb:YAG thin-disk oscillator
Oleg Pronin, Jonathan Brons, Christian Grasse, Vladimir Pervak, Gerhard
Authors: Boehm, Markus-Christian Amann, Vladimir Kalashnikov, Alexander
Apolonski, and Ferenc Krausz
Accepted: 8 November 2011
Posted: 14 November 2011
Doc. ID: 156488

Published by

OSA

High-power 200-fs Kerr-lens mode-locked Yb:YAG thin-disk oscillator

O. Pronin,¹ * J. Brons,² C. Grasse,³ V. Pervak,² G. Boehm,³
M.-C. Amann,³ V. L. Kalashnikov,⁴ A. Apolonski^{1,2} and F. Krausz^{1,2}

¹ Max-Planck Institut für Quantenoptik, Garching, Germany

² Ludwig-Maximilians-Universität München, Garching, Germany

³ Walther Schottky Institut, Garching, Germany

⁴ Institut für Photonik, TU Wien, Vienna, Austria

*Corresponding author: oleg.pronin@mpq.mpg.de

Received Month X, XXXX; revised Month X, XXXX; accepted Month X, XXXX; posted Month X, XXXX (Doc. ID XXXXX); published Month X, XXXX

We demonstrate a power-scalable Kerr-lens mode-locked (KLM) Yb:YAG thin-disk oscillator. It delivers 200-fs pulses at an average power of 17 W and a repetition rate of 40 MHz. At an increased (180 W) pump power level, the laser produces 270-fs 1.1- μ J pulses at an average power of 45 W (optical-to-optical efficiency of 25%). SESAM-assisted KLM and pure KLM with a hard aperture show similar performance. To our knowledge, these are the shortest pulses achieved from a mode-locked Yb:YAG disk oscillator and this is the first demonstration of a Kerr-lens mode-locked thin-disk laser.

© 2011 Optical Society of America

OCIS Codes: 140.3480, 140.3580, 140.4050, 140.5680

Since the invention of thin-disk technology substantial progress has been made in power and energy scaling of mode-locked disk oscillators. These advances culminated in an average output power of 140 W [1] and pulse energies of 30 μ J [2, 3] at pulse durations of 700-1000 fs. These pulse widths are larger than dictated by the gain bandwidth limit. Much effort has been dedicated to manufacturing and mode-locking broadband materials, yet the sub-200-fs regime could only be accessed with the broadband gain material Yb:LuScO₃ [4]. Although the emission band of Yb:YAG supports sub-200-fs pulses (Fig. 1), it has been understood that high-power operation is limited to 700 fs pulses. This limitation applies to mode-locking with semiconductor saturable absorber mirrors (SESAM) and relates to a higher saturated gain and reduced gain bandwidth due to a high inversion level at high-power operation [5]. In contrast, Kerr-lens mode locking of an Yb:YAG slab oscillator resulted in 35 fs pulses [6]. This remarkable performance came at the expense of dramatically reduced output power and efficiency, achieved by spectral filtering that shifted the central wavelength from 1030 nm towards 1060 nm (see Fig. 1), limiting the output power to \sim 100 mW. In this Letter, we demonstrate the feasibility of highly efficient near-gain-bandwidth-limited pulse generation from a thin-disk Yb:YAG oscillator via Kerr-lens mode locking [7]. KLM, the method of choice for sub-10-fs few-cycle pulse generation from Ti:sapphire oscillators [8], has been successfully applied for the first time to a power-scalable diode-laser-pumped thin-disk laser, opening the route to the development of user-friendly femtosecond oscillators at unprecedented power levels.

Yb:YAG is a well-established solid-state laser material commercially available in excellent optical quality and large crystal sizes. It has a broad absorption line at 940

nm as well as a zero-phonon line at 969 nm suitable for pumping by wavelength-stabilized high-power diodes. As a result of its low quantum defect, absence of excited-state absorption, high thermal conductivity and good thermo-mechanical properties, Yb:YAG constitutes a premium gain material for use in disk oscillators.

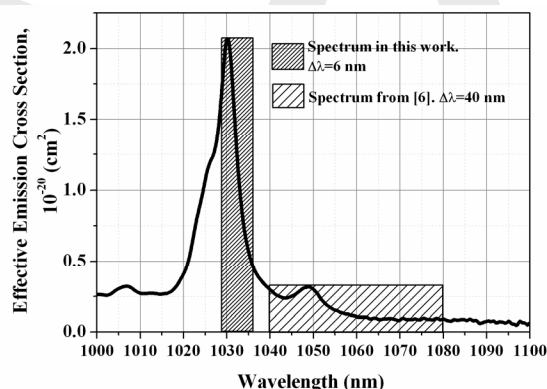


Fig. 1. The emission spectrum of Yb:YAG gain medium. The shaded areas show the spectra (FWHM) generated in the present work and in [6]

Our experimental setup, sketched in Fig. 2, includes a 220- μ m-thin wedged Yb:YAG disk of 7% doping. A disk head (Dausinger&Giesen GmbH) is aligned for 24 passes of the pump beam through the gain medium with a pump spot diameter of 3.2 mm. The Yb:YAG thin disk is used as one of the folding mirrors in a standing-wave cavity pumped by fiber-coupled diodes centered at a wavelength of 940 nm. The cavity is a convex-concave type designed for providing large mode sizes over its entire length, in order to minimize nonlinear propagation effects in air and the risk of damage to optical components. The average mode radius inside the cavity is 1.2 mm, the beam radius on

the disk is 1.3 mm, and 1 mm on the end mirror incorporating a SESAM. Owing to the large mode size on the disk and its low thickness, KLM calls for a separate nonlinear medium and a cavity section resulting in a tightly focused beam (R1-R2 in Fig. 2) with a beam waist of approximately 50 μm inside the Kerr medium.

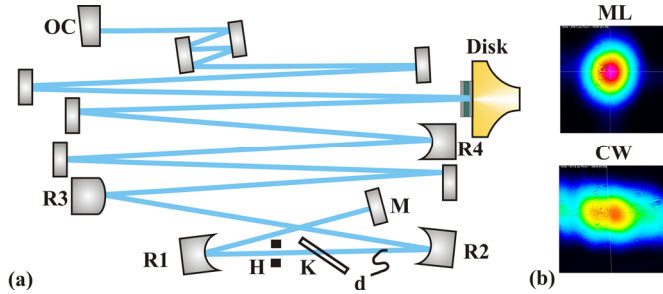


Fig. 2. (Color online) a): Schematic of the KLM Yb:YAG disk oscillator. All flat mirrors except for M are high-dispersion mirrors with $\approx 1200 \text{ fs}^2$ per bounce; OC, an output coupler with 5.5% or 14% transmission; R1, R2 concave mirrors with 0.3 m radius of curvature; R3, -4 m; R4, 4 m; K, 1-mm-thick fused silica plate placed in the focus at the Brewster angle; H, hard aperture (a pinhole); M flat mirror or SESAM. The pulse repetition rate is 40 MHz. The oscillator is placed inside a box of size $1 \times 0.4 \text{ m}^2$. b): the beam profile in mode-locked regime and in CW regime (after mode-locking has been interrupted).

In general, the cavity stability zones depend on both the length d and the thermal lens of the gain medium [9]; however, our cavity has been designed to minimize the influence of the disk thermal lensing. The KLM self-amplitude modulation depth is maximized by operating the laser near the stability zone boundary, corresponding to a maximum separation of mirrors R₁ and R₂. We found that this stability edge can be used for both soft- and hard-aperture KLM. Seven flat high-dispersion mirrors introduce a total roundtrip negative group delay dispersion of -22000 fs^2 (9 bounces, see Fig. 2) at the expenses of a loss of 0.04% per bounce [10]. Since the total amount of the dispersion of intracavity materials is negligible ($\approx 200 \text{ fs}^2$) the dispersion introduced by the mirrors serves only for balancing the nonlinear phase shift induced by the disk, air and Kerr medium. A 1-mm-thick fused silica plate is used as Kerr medium. Fused silica has a high optical damage threshold and is available in excellent optical quality. Its nonlinear index of refraction is comparable to that of sapphire and an order of magnitude smaller than that of SF57 glass, which was previously used for KLM [11]. Our cavity was designed to maintain both acceptable misalignment sensitivity and little influence of the disk thermal lens. A detailed analysis of the cavity design will be published elsewhere.

For approximately the same cavity configuration, we experimentally studied three different regimes of operation: pure SESAM mode-locking, soft aperture SESAM-assisted KLM as well as pure KLM implemented with a hard intracavity aperture. The results with pure SESAM mode-locked oscillator were reported in [12] with 100 W output power and 700-fs pulses. This

operation suffered from frequent appearance of a continuous-wave background and frequent damage to the SESAM. Both KLM operational modes resulted in much shorter pulses than SESAM mode-locking. However, SESAM-assisted KLM was less sensitive to the cavity misalignment and demonstrated better performance on a daily basis as well as self-starting operation (though not fully reproducible). SESAMs used to be the intracavity element most susceptible to damage in high-power systems, typically via self-Q-switching or relaxation oscillation spikes during the pulse buildup process. Moreover, it also exhibits two-photon absorption (TPA) [13], which tends to give rise to breakup into multi-pulsing and limits both the achievable intracavity pulse energy and minimum pulse duration. In order to eliminate these shortcomings, we applied a dielectric top coating on a SESAM with a similar structure to that reported in [14]. An 8-nm-thick InGaAs single-quantum well was incorporated into the SESAM structure characterized by the following (measured) parameters (without the top dielectric coating): saturation fluence: $F_{\text{sat}} = 50 \mu\text{J}/\text{cm}^2$, modulation depth: $\Delta R = 0.7\%$ and non-saturable loss: $\Delta R_{\text{ns}} = 0.4\%$. The top reflective dielectric coating consists of 6 alternating layers of Ta_2O_5 (128 nm) and SiO_2 (178 nm). The coating reduces the intensity level in the SESAM by a factor of 9. As a consequence, the SESAM modulation depth drops by the same factor to

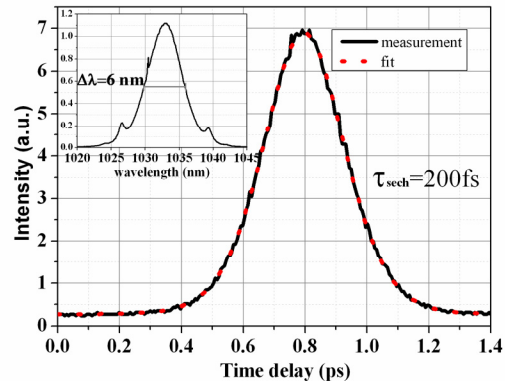


Fig. 3. (Color online) The autocorrelation and the spectrum (inset) at 17 W of output power and 5.5% output coupler (measured with an APE Pulse Check autocorrelator). The time-bandwidth product is 0.34 (sech^2 , ideal 0.315). Kelly sidebands are visible in the spectrum wings. This measurement was performed for the SESAM-assisted KLM.

$\Delta R < 0.1\%$ and the saturation fluence rises to $F_{\text{sat}} > 400 \mu\text{J}/\text{cm}^2$, which leads to a reduced TPA and to increased damage threshold [14]. Because of the small modulation depth, this SESAM alone cannot result in stable mode-locking. Nevertheless, it can reliably start KLM operation, with good day-to-day reproducibility. SESAM-assisted KLM has peak-to-peak amplitude fluctuations $< 3\%$ within the 1 s measurement time, which is comparable to the pure SESAM mode-locked case. No measures were taken for acoustic insulation of the laser box. Being mode-locked once, the oscillator remains stable all day. To our knowledge, this is the first demonstration of such a low-modulation depth

single-quantum well SESAM used as a starter and mode-locking stabilizer for KLM operation [14, 16]. It should be noted that this overcoated SESAM had never been damaged during our experiments.

Similar performance has been achieved through the use of pure hard-aperture KLM. The SESAM in position M (see Fig. 2) was replaced by a high-reflection mirror and aperture H was inserted in the form of a pinhole. In this case the mode-locking was initiated by translating the cavity mirror R1. The power fluctuations were similar to those measured for a SESAM-assisted KLM.

The oscillator has been successfully operated with two different output couplers of 5.5% and 14%. With the low output coupling, we achieved 17 W of average power at 110 W of pump power, which corresponds to an optical-to-optical efficiency of 15%. Under these conditions, we measured a pulse duration of 200 fs (assuming a sech^2 pulse shape) with a spectral width of 6 nm (FWHM), see Fig. 3. With high output coupling, we could achieve stable operation up to pump power levels of 180 W, resulting in an average output power of 45 W, corresponding to 1.1- μJ pulses and 25% optical-to-optical efficiency. The autocorrelation and spectrum shapes were similar to those shown in Fig. 3 with a pulse duration of 270 fs. In both operational regimes, the intracavity pulse energy was approximately 8 μJ . Our attempts to reach higher energy led to the onset of multi-pulsing or cw background. Self-Q-switching instabilities used to appear only during the alignment of the oscillator. The suppression of Q-switching is very likely caused by saturation of the KLM self-amplitude modulation.

Kerr-lens mode-locking of disk lasers appears to be most promising in terms of further power/energy scaling. Obvious advantages of KLM over pure SESAM mode-locking include i) much faster response of the self-amplitude modulation mechanism, leading to the shortest pulses demonstrated so far, ii) absence of non-saturable losses and TPA, iii) much higher resistance to damage. The theory [17] predicts that even higher energies may be attained in proportion to i) increase of the anomalous intracavity group-delay dispersion and/or ii) decrease of the nonlinear phase shift in the Kerr medium. Stable operation with higher energy and shorter pulses was also predicted in the case of larger modulation depth of hard-aperture KLM. We expect that optimized KLM might allow generating shorter pulses than those set by the emission bandwidth of Yb:YAG. Another conventional route for generating shorter pulses with higher energies in KLM thin-disk lasers is the use of more broadband materials (Yb:Lu₂O₃, Yb:LuScO₃, Yb:CALGO).

In conclusion, we have demonstrated a KLM Yb:YAG thin-disk oscillator delivering 1.1 μJ of pulse energy, 45 W of average output power and 270-fs pulses. Even shorter 200-fs pulses were generated at a lower average power of 17 W. We realized stable operation of the oscillator in spite of operating with a large intracavity mode as well as with a pronounced thermal lens in the gain medium. Free of TPA and resistant to high intracavity intensities, our approach is

power/energy-scalable. The KLM technique applied, for the first time to a thin-disk oscillator, reveals a hidden potential of the Yb:YAG material for supporting 200-fs pulses with a potential for further improvements with improved KLM modulation.

The authors are indebted to M. Larionov, C. Teisset, J. Rauschenberger, V. Kristijonas, R. Graf and O. Razskazovskaya for discussions and technical support. They thank F. Schaettiger and D. Bauer for the SESAM measurements. Fruitful discussions with M. Lederer and E. Sorokin are gratefully acknowledged. This work was funded by the Munich Centre for Advanced Photonics (MAP) and the Photonic Nanomaterials (PhoNa) research initiative. VLK thanks Austrian FWF project P20293 for their support.

References

1. C. R. E. Baer, C. Kränkel, C. J. Saraceno, O. H. Heckl, M. Golling, R. Peters, K. Petermann, T. Südmeyer, G. Huber, and U. Keller, *Opt. Lett.* **35**, 2302 (2010)
2. D. Bauer, F. Schättiger, J. Kleinbauer, D. H. Sutter, A. Killi, and T. Dekorsy, in *Advanced Solid-State Photonics*, paper ATuC2 (2011)
3. J. Neuhaus, D. Bauer, J. Zhang, A. Killi, J. Kleinbauer, M. Kumkar, S. Weiler, M. Guina, D. H. Sutter, and T. Dekorsy, *Opt. Express* **16**, 20530 (2008)
4. C. J. Saraceno, O. H. Heckl, C. R. E. Baer, M. Golling, T. Südmeyer, K. Beil, C. Kränkel, K. Petermann, G. Huber, and U. Keller, *Opt. Express* **19**, 20288 (2011)
5. T. Südmeyer, C. Kränkel, C. R. E. Baer, O. H. Heckl, C. J. Saraceno, M. Golling, R. Peters, K. Petermann, G. Huber and U. Keller, *Appl. Phys. B* **97**, 281 (2009)
6. S. Uemura and K. Torizuka, *Jpn. J. Appl. Phys.* **50**, 010201 (2011)
7. T. Brabec, Ch. Spielmann, P. F. Curley, and F. Krausz, *Opt. Lett.* **17**, 1292 (1992)
8. Stingl, M. Lenzner, Ch. Spielmann, F. Krausz, and R. Szipöcs, *Opt. Lett.* **20**, 602 (1995)
9. V. Magni, *J. Opt. Soc. Am. A* **4**, 1962 (1987)
10. V. Pervak, C. Teisset, A. Sugita, S. Naumov, F. Krausz, and A. Apolonski, *Opt. Express* **16**, 10220 (2008)
11. B. Henrich and R. Beigang, *Opt. Comm.* **135**, 300 (1997)
12. O. Pronin, V. Kalashnikov, V. Pervak, C. Teisset, M. Larionov, J. Rauschenberger, A. Apolonski, E. Fill, and F. Krausz, in *CLEO/Europe and EOEC 2011 Conference Digest*, paper CA11_5 (2011)
13. R. Grange, M. Haiml, R. Paschotta, G. J. Spühler, L. Krainer, O. Ostinelli, M. Golling, U. Keller, *Appl. Phys. B* **80**, 151 (2005)
14. C. J. Saraceno, C. Schriber, M. Mangold, M. Hoffmann, O. H. Heckl, C. R. Baer, M. Golling, T. Südmeyer, U. Keller, *IEEE J. Quantum. Electron.*, **PP**, 1 (2011)
15. M. Tokurakawa, A. Shirakawa, K. Ueda, H. Yagi, S. Hosokawa, T. Yanagitani, and A. A. Kaminskii, *Opt. Lett.* **33**, 1380 (2008)
16. H. Sutter, G. Steinmeyer, L. Gallmann, N. Matuschek, F. Morier-Genoud, U. Keller, V. Scheuer, G. Angelow, and T. Tschudi, *Opt. Lett.* **24**, 631 (1999)
17. V. L. Kalashnikov, in preparation

Full citation list

- 1) C. R. E. Baer, C. Kränkel, C. J. Saraceno, O. H. Heckl, M. Golling, R. Peters, K. Petermann, T. Südmeyer, G. Huber, and U. Keller, "Femtosecond thin-disk laser with 141 W of average power," *Opt. Lett.* **35**, 2302-2304 (2010)
- 2) D. Bauer, F. Schättiger, J. Kleinbauer, D. H. Sutter, A. Killi, and T. Dekorsy, "Energies above 30 μ J and average power beyond 100 W directly from a mode-locked thin-disk oscillator," in *Advanced Solid-State Photonics*, OSA Technical Digest (CD) (Optical Society of America, 2011), paper ATuC2.
- 3) C. J. Saraceno, O. H. Heckl, C. R. E. Baer, M. Golling, T. Südmeyer, K. Beil, C. Kränkel, K. Petermann, G. Huber, and U. Keller, "SESAMs for high-power femtosecond modelocking: power scaling of an Yb:LuScO₃ thin disk laser to 23 W and 235 fs," *Opt. Express* **19**, 20288-20300 (2011)
- 4) J. Neuhaus, D. Bauer, J. Zhang, A. Killi, J. Kleinbauer, M. Kumkar, S. Weiler, M. Guina, D. H. Sutter, and T. Dekorsy, "Subpicosecond thin-disk laser oscillator with pulse energies of up to 25.9 microjoules by use of an active multipass geometry," *Opt. Express* **16**, 20530-20539 (2008)
- 5) T. Südmeyer, C. Kränkel, C. R. E. Baer, O. H. Heckl, C. J. Saraceno, M. Golling, R. Peters, K. Petermann, G. Huber und U. Keller, "High-power ultrafast thin disk laser oscillators and their potential for sub-100-femtosecond pulse generation," *Appl. Phys. B* **97**, 281-295 (2009)
- 6) S. Uemura and K. Torizuka, "Sub-40-fs Pulses from a Diode-Pumped Kerr-Lens Mode-Locked Yb-Doped Yttrium Aluminum Garnet Laser," *Jpn. J. Appl. Phys.* **50**, 010201 (2011)
- 7) T. Brabec, Ch. Spielmann, P. F. Curley, and F. Krausz, "Kerr lens mode locking," *Opt. Lett.* **17**, 1292-1294 (1992)
- 8) Stingl, M. Lenzner, Ch. Spielmann, F. Krausz, and R. Szipöcs, "Sub-10-fs mirror-dispersion-controlled Ti:sapphire laser," *Opt. Lett.* **20**, 602-604 (1995)
- 9) V. Magni, "Multielement stable resonators containing a variable lens," *J. Opt. Soc. Am. A* **4**, 1962-1969 (1987)
- 10) V. Pervak, C. Teisset, A. Sugita, S. Naumov, F. Krausz, and A. Apolonski, "High-dispersive mirrors for femtosecond lasers," *Opt. Express* **16**, 10220-10233 (2008)
- 11) B. Henrich and R. Beigang, "Self-starting Kerr-lens mode locking of a Nd: YAG-laser," *Opt. Comm.* **135**, 300-304 (1997)
- 12) O. Pronin, V. Kalashnikov, V. Pervak, C. Teisset, M. Larionov, J. Rauschenberger, A. Apolonski, E. Fill, and F. Krausz, "Scalability of mode-locked thin-disk oscillators: issues and scenarios of destabilization," in *CLEO/Europe and EQEC 2011 Conference Digest*, OSA Technical Digest (CD) (Optical Society of America, 2011), paper CA11_5.
- 13) R. Grange, M. Haiml, R. Paschotta, G. J. Spühler, L. Krainer, O. Ostinelli, M. Golling, U. Keller, "New regime of inverse saturable absorption for self-stabilizing passively modelocked lasers", *Appl. Phys. B* **80**, 151-158 (2005)
- 14) C. J. Saraceno, C. Schriber, M. Mangold, M. Hoffmann, O. H. Heckl, C. R. Baer, M. Golling, T. Südmeyer, U. Keller, "SESAMs for High-Power Oscillators: Design Guidelines and Damage Thresholds," *IEEE J. Quantum. Electron.*, **PP**, 1-13 (2011)
- 15) M. Tokurakawa, A. Shirakawa, K. Ueda, H. Yagi, S. Hosokawa, T. Yanagitani, and A. A. Kaminskii, "Diode-pumped 65 fs Kerr-lens mode-locked Yb³⁺:Lu₂O₃ and nondoped Y₂O₃ combined ceramic laser," *Opt. Lett.* **33**, 1380-1382 (2008)
- 16) H. Sutter, G. Steinmeyer, L. Gallmann, N. Matuschek, F. Morier-Genoud, U. Keller, V. Scheuer, G. Angelow, and T. Tschudi, "Semiconductor saturable-absorber mirror assisted Kerr-lens mode-locked Ti:sapphire laser producing pulses in the two-cycle regime," *Opt. Lett.* **24**, 631-633 (1999)
- 17) V. Kalashnikov, in preparation