



Make Us Your Homepage

Advanced search

VE Fires in Vehicles
[Home](#) » [Technologies](#) » [Other](#) » Antimony Based Tunable Diode Lasers for ...

Monday Aug 16, 2010

ON-LINE NEWSLETTER
[Subscribe Now -- FREE](#)
[View Past Issues](#)

FS-World Magazine

- » Home
- » News
- » Technologies
- » Products
- » Companies
- » Business Arena
- » Events
- » Useful Links
- » Forum
- » Group Member

Complimentary Services

- [Send us Company News](#)
- [Post a Product](#)
- [Send us Technology News](#)
- [Post Business Opportunity](#)
- [Post Buy & Sell Offer](#)
- [Post Career Opportunity](#)
- [Post Merger & Acquisition Info](#)
- [Publish an event](#)
- [Participate in The Forum](#)

Companies

[New India Office for Infinova in Pune](#)


Fire & Safety Group
Technical Forums
FIVE FIRES IN VEHICLES

Technologies

[Email page](#) | [Print friendly](#)

Antimony Based Tunable Diode Lasers for Trace-gas Sensing

August 16, 2010

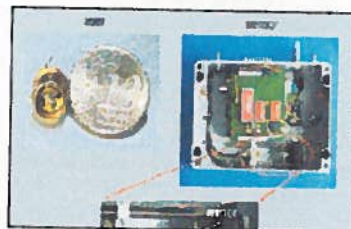

Most laser applications in the near- and mid-infrared spectral region require low-cost laser devices with excellent spectral performance and particularly in sensing applications, emission wavelength tunability. These goals can ideally be achieved by the innovative vertical-cavity surface-emitting lasers (VCSELs) as light sources. VCSEL diodes are the youngest members of the semiconductor laser diode family. GaAs- and InPbased VCSELs recently revolutionized datacom and optical mouse applications but their wavelength is limited to about 2 μm . On the other hand, classical antimony (Sb)-based diode lasers well work up to wavelengths of at least 3.5 μm , however, their difficult and expensive technology prevented their widespread use. In the NEMIS project, aiming on the development of compact and packaged vertical-cavity surface-emitting laser diodes (VCSELs) for the 2-3.5 μm wavelength range and pilot photonic sensing systems for trace gas analysis, a demonstrator for optical CO measurement at 2.33 μm has recently been developed. These electrically pumped single-mode and tunable lasers operate continuously with very low threshold currents up to 90°C. Actually, by utilizing VCSELs' most attractive features such as efficient electronic wavelength tuning, several absorption lines of a single gas species can be scanned using the full tuning range of such lasers which already proved their suitability in gas sensing applications.

The absorption for most gases such as methane (CH₄), carbon monoxide (CO) and water (H₂O) is by more than one order of magnitude stronger at wavelengths above 2 μm than at shorter wavelengths. Especially for carbon monoxide (CO), only the utilization of wavelengths around 2.3 μm enables sensing with a much higher sensitivity for a typical sensor system using tunable diode laser spectroscopy (TDLS). A demonstrator for optical CO measurement at 2.33 μm has recently been developed. CO escaping from home burners is the most frequent cause for unintentional death at home with a death toll of annually 500 persons in the USA.

The common particle-detection based fire detectors have unwanted cross-sensitivities to many substances like water vapor (especially in kitchens or bathrooms), hairspray or general dust. On the other hand, gas-sensor based fire detection seems to be an interesting approach for fire detection with reduced false alarm rates. Due to its absence in ambient air and its toxicity, CO is the prominent gas to be detected for gas sensor based fire detection. In addition, the 2.6-2.65 μm wavelength region shows strong water vapor absorption lines making this range well adapted to water measurements and isotopic ratio studies. This wavelength regime especially at 2.605, 2.596 and 2.594 μm are very important for the detection of water vapor since the strongest water vapor absorption lines are found exactly at these lines. Impressive results are obtained on electrically pumped, singlemode VCSELs at abovementioned emission wavelengths with sufficient optical output power, being well-suited for the targeted application.

Contact Details

Company Name Walter Schottky Institute, Technical University of Munich
 Contact Person Mr. Shamsul Arafin
 Position Phd Student
 Address Am Coulombwall 3
 Garching D-85748
 Germany
 Phone +49-(0)89-289-12788

Log in [Edit Details](#)
 You are logged on as

Arafin

Our Latest Issue



[Subscribe](#) | [Advertising](#)

Forum - Hot Topics

- [Breathing Apparatus Requirements/Standards for Operational Tunnels](#)
- [Fuel Oil Pipeline Crossing Under 380kV Overhead Lines](#)
- [Fire Fighting System for Electrical Control Building & Transformers](#)
- [Transformer and Diesel Generator](#)

FAQ

- [Fire Detection](#)
- [Fire Extinguishing](#)
- [Halon Alternatives](#)
- [Personal Locator Beacon \(PLB\)](#)



Fax +49-(0)89-289-12737
Email shamsul.arafin@wsi.tum.de
Web Site <http://www.wsi.tum.de>

Comments:

Submit

 [Print friendly](#)  [Email page](#)

[Home](#) | [About us](#) | [Contact us](#) | [Subscribe](#)

FS-World.com does not warrant or assume any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process presented here.